

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



531 638

(43) International Publication Date  
29 April 2004 (29.04.2004)

PCT

(10) International Publication Number  
WO 2004/036791 A1

(51) International Patent Classification?: H04B 7/26

(21) International Application Number:  
PCT/KR2003/002188

(22) International Filing Date: 18 October 2003 (18.10.2003)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:  
10-2002-0064009 19 October 2002 (19.10.2002) KR

(71) Applicant (for all designated States except US): SAM-  
SUNG ELECTRONICS CO., LTD. [KR/KR]; 416, Mae-  
tan-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do 442-742  
(KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): KIM, Sung-Jin  
[KR/KR]; 439-1201 Cheongmyeong Maeul Samsung  
Raemian Apt., 1046-1 Youngtong-dong, Paldal-gu, Su-  
won-city, 442-470 Kyungki-do (KR). LI, Jun Quilang  
[CN/KR]; c/o Samsung Advanced Institute of Technology,  
San 14-1 Nongseo-ri, Kiheung-eub, Yongin-city, 449-712

Kyungki-do (KR). KIM, Ki-Ho [KR/KR]; 2-1101 Sam-  
pung Apt., 1685 Seocho-dong, Seocho-gu, 137-779 Seoul  
(KR). KIM, Ho-Jin [KR/KR]; 62-405 Hyundai Apt.,  
Apgujeong-dong, Gangnam-gu, 135-110 Seoul (KR).

(74) Agent: LEE, Young-Pil; The Cheonghwa Building,  
1571-18, Seocho-dong, Seocho-gu, 137-874 Seoul (KR).


(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report

[Continued on next page]

(54) Title: MOBILE COMMUNICATION APPARATUS AND METHOD INCLUDING BASE STATION AND MOBILE STA-  
TION HAVING MULTI-ANTENNA

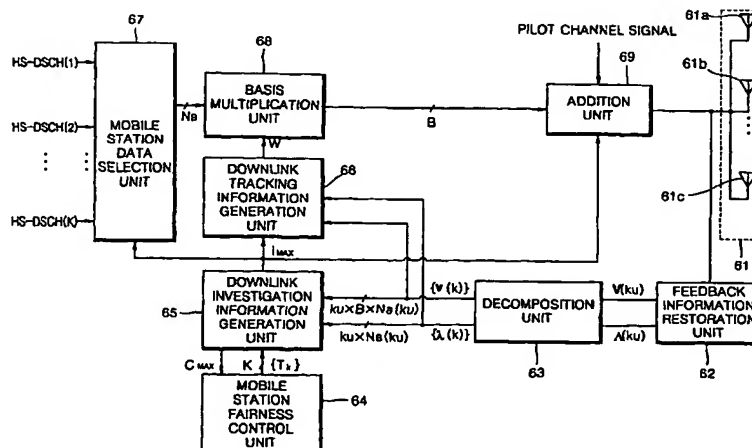

(57) Abstract: The present invention discloses a mobile communication apparatus and method including a base station and a mobile station both having multi-antenna. As for the apparatus, including a base station and at least two mobile stations. The base station carries out the following functions: (a) restores weighted information and channel status information which have been decided by mobile stations from feedback signals received by mobile stations; (b) selects the downlink detect information which satisfies the largest transferring channel capacity from the above weighting information and channel status information which have been restored; (c) selects mobile stations to transmit at the same time from all mobile stations which are able to transmit using downlink detect information; and (d) processes data which will be transferred to select mobile stations with downlink detect information. The base station has at least one base station antenna, and the mobile station has at least one mobile station antenna.

WS 2004/036791 A1



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**MOBILE COMMUNICATION APPARATUS AND METHOD  
INCLUDING BASE STATION AND MOBILE STATION HAVING  
MULTI-ANTENNA**

5    Technical Field

          The present invention relates to mobile communications, and more particularly, to a mobile communication apparatus including multi-antenna base station and mobile stations, which maximizes throughput in a multi-user communication environment based on high-speed downlink wireless packet access, and a mobile communication method therefor.

Background Art

          Various technologies are used to maximize throughput in mobile communications. As such, logical improvements using new wireless access and physical improvements using, for example, multiple antennas, have attracted more attention than other methods.

          First, as an example of a new wireless access based logical improvement method, next-generation mobile communication system standardization associations have proposed in recent years new standard packet access technologies enabling high-speed packet transmission via downlinks. The 3<sup>rd</sup> Generation Partnership Project (3GPP), an asynchronous standardization association led by Europe and Japan, works for the standardization of high-speed downlink packet access (HSDPA) technology, and the 3GPP2, a synchronous standardization association led by the U.S. works for the standardization of 1x Evolution Data Only/Voice (1xEV-DO/V) technology. The HSDPA and 1xEV-DO/V technologies suitable for web-based Internet services are based on high-speed downlink packet access for wireless packet transmission. Since high-speed downlink packet access is optimized for peak throughput as well as average throughput, it can achieve peak

throughput in an intermittent wireless packet transmission environment. The implementation of such a high-speed downlink packet access technology basically requires an adaptive modulation & coding (AMC) technology, a hybrid automatic request (HARQ) technology, and a multi-user diversity scheduling technology. Basic technologies for downlink packet access are described in the 3GPP specification, an European IMT-2000 standard available at [www.3gpp.org](http://www.3gpp.org), the 3GPP2 specification available at [www.3gpp2.org](http://www.3gpp2.org), and the article "CDMA/HDR: A Bandwidth Efficient High Speed Wireless Data Service for Nomadic Users" by *P. Bender, P. Black, M. Grob, R. Padovani, N. Sindhushayana, and A. Viterbi*, IEEE Communications, Vol. 38(7), 70-78, July, 2000.

Second, unlike the wireless access improvement method enabling the efficient use of bandwidths within a given range, a physical improvement method using multiple antennas increases bandwidth resources using more spatial resources to maximize throughput. Recently, Lucent Technologies verified through intensive research into BLAST (Bell Labs LAYered Space Time) demonstrated that the bandwidth is increased  $\min(N,M)$  times when using  $N$  base station antennas and  $M$  mobile station antennas compared to when using a single base station antenna and a single mobile station antenna. Here,  $\min(N,M)$  means the minimum of  $N$  and  $M$ . This research ensured the effectiveness of using multiple antennas for peak throughput. The principle of increasing the channel capacity using multiples antennas in a base station and mobile stations can be explained based on a matrix rank criterion. The number of paths is determined by the rank characteristic of the matrix  $H$  of channel downlink characteristics of multiple base station and mobile station antennas. A rich scatter environment for mobile communications can be created by a number of uncritical obstacles. In such a rich scatter communication environment, the theoretical maximum capacity  $C_{MAX}$  of a multi-antenna

communication system including a base station and a single mobile station is expressed as equation (1) below based on Shannon's channel capacity bound principle.

$$C_{MAX} = \log_2 \det \left[ \mathbf{I} + \frac{1}{\sigma_n^2} \mathbf{H}^H \mathbf{P} \mathbf{H} \right] \quad \dots(1)$$

where  $\mathbf{I}$  denotes an identity matrix,  $\mathbf{P}$  denotes a diagonal matrix of power allocation parameters, and  $\sigma_n^2$  denotes the variance of noise. Shannon's channel capacity bound principle and Lucent's BLAST technology are described in the article entitled "On Limits of Wireless Communications in a Fading Environment When Using Multiple Antennas," by *G.J Foschini* and *M.J. Gans*, *Wireless Personal Communications*, Vol. 6, pp. 311-335, August 1998.

In particular, Lucent's BLAST technology provides maximum channel capacity based on equation (1) in an environment where one base station corresponds to one mobile station. Since the BLAST technology does not require channel information feedback, problems such as delay or erroneous fed-back do not arise. However, in a multi-antenna system based on Lucent's BLAST technology, in which data is transmitted via only one channel between the base station and a mobile station, and no channel information is fed back, it is impossible to apply a nulling method, which forms a principle of multi-antenna systems, and to achieve peak throughput in a multi-user, multi-antenna system environment. In addition, there is a structural limitation in that more mobile station antennas than base station antennas are required. The concept of the nulling principle for multi-antenna systems is described in the article entitled "Applications of Antenna Arrays to Mobile Communications, Part I: Performance Improvement, Feasibility, and System Considerations," by *LAL C. GODARA*, *Proceedings of the IEEE*, Vol. 85, No. 7, 1031-1097, July 1997 (refer to D. Null Beamforming on

page 1041).

In the above-described physical improvement method using multiple antennas, channel information cannot be fed back to achieve peak throughput in a low-speed Doppler environment including

- 5 low-speed mobile stations, in which channel switching rarely occurs, or in a high-power environment ensuring minimal channel feedback errors. The problem of lower throughput is considered to be more serious because information fed back from a plurality of mobile stations cannot be simultaneously considered.

- 10 To solve the problem of the above-described method that information fed back from a plurality of mobile stations cannot be simultaneously interpreted, there are required the following considerations: (1) separating channel investigation and tracking sections for adaptation to a high-speed Doppler channel environment, (2)
- 15 how to handle a plurality of mobile stations having unfair packets, (3) quantization using spatial weighting factors for efficient channel information measurement, and (4) compatibility with existing standards. However, it has never been considered so far to generate channel information based on the currently available weight information and
- 20 channel status information, rather using new channel information, to achieve maximum channel throughput.

#### Disclosure of the Invention

- The present invention provides a mobile communication
- 25 apparatus including a base station with at least two base station antennas and at least two mobile stations each of which has at least one antenna. In the mobile communication apparatus, the downlink characteristics of spatial channels between the base station and at least two mobile stations are considered with respect to every mobile station,
- 30 thereby solving a problem of delay in optimal beamforming by the base

station antenna and in multi-stream data transmission. In addition, according to the present invention, user fairness in data transmission is also considered, and channel information is measured in an easier way, ensuring the nominal throughput for multi-user, multi-antenna systems.

5       The present invention also provides a mobile communication method performed in the above mobile communication apparatus that include multiple base station and mobile station antennas.

          In an aspect of the present invention, there is provided a mobile communication apparatus with multiple base station/mobile station  
10    antennas, the apparatus including a base station and at least two mobile stations, comprising: the base station restoring weight information and channel status information from feedback signals received from the mobile stations, determining downlink investigation information that results in maximum transmission channel capacity based on the restored  
15    weight information and channel status information, selecting mobile stations for simultaneous transmission from among all of the mobile stations based on the downlink investigation information, and processing data to be transmitted to the selected mobile stations based on the downlink investigation information, wherein the base station includes at  
20    least two base station antennas and each of the mobile stations includes at least one mobile station antenna.

          In another aspect of the present invention, there is provided a mobile communication apparatus with multiple base station/mobile station antennas, the apparatus including a base station and at least two  
25    mobile stations, comprising: the base station restoring weight information and channel status information from feedback signals received from the mobile stations, determining downlink investigation information that results in maximum transmission channel capacity based on the restored weight information and channel status information, selecting mobile  
30    stations for simultaneous transmission from among all of the mobile

stations based on the downlink investigation information, determining downlink tracking information based on the channel downlink investigation information and restored weight information and channel status information regarding the selected mobile stations, and processing  
5 data to be transmitted to the selected mobile stations based on the downlink tracking information, wherein the base station includes at least two base station antennas and each of the mobile stations includes at least one mobile station antenna.

In another aspect of the present invention, there is provided a  
10 method of mobile communications between a base station and at least two mobile stations, wherein the base station includes at least two base station antennas, and each of the mobile stations includes at least one mobile station antenna, the method comprising (a) the base station restoring weight information and channel status information from  
15 feedback signals received from the mobile stations, determining downlink investigation information that results in maximum transmission channel capacity based on the restored weight information and channel status information, selecting mobile stations for simultaneous transmission from among all of the mobile stations based on the downlink investigation  
20 information, and processing data to be transmitted to the selected mobile stations based on the downlink investigation information.

In another aspect of the present invention, there is provided a method of mobile communications between a base station and at least two mobile stations, wherein the base station includes at least two base  
25 station antennas, and each of the mobile stations includes at least one mobile station antenna, the method comprising (a) the base station restoring weight information and channel status information from feedback signals received from the mobile stations, determining downlink investigation information that results in maximum transmission channel  
30 capacity based on the restored weight information and channel status



information, selecting mobile stations for simultaneous transmission from among all of the mobile stations based on the downlink investigation information, determining downlink tracking information based on the channel downlink investigation information and restored weight  
5 information and channel status information regarding the selected mobile stations, and processing data to be transmitted to the selected mobile stations based on the downlink tracking information.

The method further comprises (b) each of the mobile stations measuring downlink characteristics of multiple base station/mobile  
10 station antenna channels based on pilot channel signals transmitted from the base station, determining the weight information and channel status information based on the downlink characteristics, converting the determined weight information and channel status information into the feedback signals, transmitting the feedback signals to the base station,  
15 and detecting high-speed downlink shared channel (HS-DSCH) signals in units of a frame based on the downlink characteristics, and a first control signal and data signals, which are transmitted from the base station.

## 20 Brief Description of the Drawings

FIG. 1 is a block diagram of a mobile communication apparatus according to an embodiment of the present invention;

FIG. 2 is a flowchart of a mobile communication method according to an embodiment of the present invention performed in the mobile  
25 communication apparatus in FIG. 1;

FIG. 3 is a flowchart of an embodiment of step 21 in FIG. 2 according to the present invention;

FIG. 4 is a block diagram of an embodiment of a first, second, ..., or  $K^{\text{th}}$  mobile station in FIG. 1 according to the present invention;

30 FIG. 5 is a flowchart of an embodiment of step 23 in FIG. 2

according to the present invention;

FIG. 6 is a block diagram of an embodiment of a base station in FIG. 1;

FIG. 7 is a flowchart of an embodiment of step 52 in FIG. 5 according to the present invention;

FIG. 8 is a block diagram of an embodiment of a downlink investigation information generation unit in FIG. 6 according to the present invention;

FIG. 9 is a flowchart of an embodiment of step 53 in FIG. 5; and

FIG. 10 is a block diagram of an embodiment of a downlink tracking information generation unit in FIG. 6.

#### Best mode for carrying out the Invention

The structure and operation of a mobile communication apparatus that utilizes multiple base station and mobile station antennas, and a mobile communication method therefor according to the present invention will be described in detail with reference to the appended drawings.

As shown in FIG. 1, which is a block diagram of a mobile communication apparatus according to an embodiment of the present invention, the mobile communication apparatus includes a base station 11, a first mobile station 13, a second mobile station 15, ..., and a  $K^{\text{th}}$  mobile station 17. Each of the  $K$  mobile stations, where  $K$  is an integer of 2 or greater, performs the same function. According to the present invention, the number of mobile station antennas,  $M(k_u)$ , in each of the mobile stations 13 through 17 may be greater than 1 and smaller than the number of base station antennas,  $B$ , in the base station 11, i.e.,  $1 \leq M(k_u) < B$ . The number of mobile station antennas  $M(k_u)$  may be greater than or equal to the number of base station antennas  $B$ , i.e.,  $M(k_u) \geq B$ .  $M(k_u)$  is a positive integer that is greater than or equal to 1,  $B$

is a positive integer that is greater than or equal to 2, and  $k_u$  denotes mobile station's ID number, where  $1 \leq k_u \leq K$ .

FIG. 2 is a flowchart illustrating a mobile communication method according to an embodiment of the present invention performed in the mobile communication apparatus in FIG. 1. The mobile communication method includes determining and transmitting weight information and channel status information and detecting high-speed downlink shared channel (HS-DSCH) signals (step 21) and adding pilot channel (PICH) signals to data signals generated based on the weight information and channel status information restored from feedback signals and transmitting the added results (step 23).

Step 23 in FIG. 2 that is performed in the base station 11 will now be described prior to a description on step 21.

The base station 11 restores the weight information and channel status information determined in each of the first through  $K^{\text{th}}$  mobile stations 13 through 17 from the feedback signals received from each of the first through  $K^{\text{th}}$  mobile stations 13 through 17 based on the channel downlink characteristics of the multiple base station and mobile station antennas (hereinafter, referred to as first characteristics  $\mathbf{H}(k_u)$ ), where  $\mathbf{H}(k_u)$  is a matrix with  $1 \leq k_u \leq K$ . Hereinafter, capital bold letters indicate matrices, small bold letters indicate vectors, and non-bold symbols indicate scalars. The base station 11 also generates downlink investigation information that ensures maximum throughput based on the restored weight information and channel status information regarding each of the mobile stations. The maximum throughput may be calculated in consideration of transmission packet fairness information. The base station 11 selects data regarding mobile stations for simultaneous transmission from among data regarding all of the mobile stations based on the generated downlink investigation information. The base station 11 generates downlink tracking information appropriate

to instant channel situations based on feedback signals received from the mobile stations selected for simultaneous transmission. The base station 11 matrix-multiplies the data regarding the selected mobile stations by the downlink tracking information that is mutual weight  
5 information, adds mobile station selection information and pilot channel signals PICH<sub>i</sub> to the products (also referred to as data signals) of the multiplication, and transmits the added results to the first through K<sup>th</sup> mobile stations 13 through 17 in units of a frame.

The downlink investigation information includes mobile station  
10 selection information described later, i.e., information regarding mobile stations to which data will be concurrently transmitted. The first characteristics  $H(k_u)$  means the phase and magnitude of channels through which data are transmitted from the base station 11 to arbitrary mobile stations 13, 15, ..., or 17. The first characteristics  $H(k_u)$  that is  
15 a matrix consisted of base station antennal channels in columns and mobile station antenna channels in rows. In other words, the column components of the first characteristics matrix  $H(k_u)$  are derived from the space formed by the base station antennas, and the row components thereof are derived from the space formed by the mobile station antenna.  
20 The pilot channel signals PICH<sub>i</sub> may be common pilot channel (CPICH) signals, dedicated common pilot channel (DCPICH) signals, secondary common pilot channel (SCPICH) signals, etc.

In another embodiment of the base station 11, instead of generating the downlink tracking information, mutual weight information  
25 contained in the downlink investigation information may be matrix-multiplied by the data regarding the selected mobile stations.

The first through K<sup>th</sup> mobile stations 13 through 17 may be implemented in any structure provided that they ensures the base station 11 to perform the above operations and that they can determine the  
30 weight information and channel status information based on the first

characteristics  $H(k_u)$ . Step 21 in FIG. 2 performed in the first through  $K^{\text{th}}$  mobile stations 13 through 17 will now be described.

Each of the first through  $K^{\text{th}}$  mobile stations 13 through 17 measures the first characteristics  $H(k_u)$  based on the PICH signals transmitted from the base station 11 and determines based on the measured first characteristics  $H(k_u)$  the weight information and channel status information that ensure peak throughput to each of the channels connecting the base station and mobile station antennas. Each of the first through  $K^{\text{th}}$  mobile stations 13 through 17 converts the determined weight information and channel status information into feedback signals and transmits them to the base station 11. Each of the first through  $K^{\text{th}}$  mobile stations 13 through 17 generates a high-speed downlink shared channel (HS-DSCH) signal in units of a frame based on the first characteristics  $H(k_u)$ , and a first control signal and data signals, which are received from the base station 11.

Each of the first through  $K^{\text{th}}$  mobile stations 13 through 17 analyses the first control signal received through the mobile station antennas to determine whether a signal transmitted from the base station 11 is correctly addressed thereto. The HS-DSCH signal reflects the second and third characteristics of channels. The second characteristics imply that the transmission of data through a channel is completed without requiring channel switching because the length of a data frame, i.e., the unit of data transmission, is much shorter than the coherence time of a general Doppler channel. The third characteristics are related to the non-continuous, burst transmission of data through a channel commonly owned by all of the mobile stations 13 through 17 belonging to the base station 11.

For the convenience of understanding the present invention, embodiments of the first, second, ..., or  $K^{\text{th}}$  mobile station 13, 15, ..., or 17 in FIG. 1 and step 21 will be described first, followed by descriptions on

embodiments of the base station 11 and step 23.

FIG. 3 is a flowchart illustrating an embodiment of step 21 in FIG. 2 according to the present invention, which includes transmitting the weight information and channel status information determined based on the first characteristics  $H(k)$  to the base station 11 (steps 31 through 33) and selecting and combining desired data information from among data information restored based on the data signals transmitted from the base station 11 (steps 34 through 37).

FIG. 4 is a block diagram of an embodiment of the first, second, ..., or  $K^{\text{th}}$  mobile station 13, 15, ..., 17 in FIG. 1, which includes an antenna array 41, a channel characteristics measurement unit 42, a channel information determination unit 43, an information feedback unit 44, a control information restoration unit 45, a data information restoration unit 46, a data information selection unit 47, and a data information combination unit 48.

The operation of the first, second, ..., or  $K^{\text{th}}$  mobile station 13, 15, ..., or 17 having the structure of FIG. 4 will be described in connection with the flowchart of FIG. 3.

In particular, the antenna array 41 in FIG. 4 includes  $M(k_u)$  mobile antennas 41a, 41b, ..., and 41c. The antenna array 41 receives the PICH signals, the data signals, and the first control signal transmitted from the base station 11. The channel characteristics measurement unit 42 measures the first characteristics  $H(k_u)$  based on the PICH signals received via the antenna array 41 from the base station 11 and outputs the measured first characteristics  $H(k_u)$  to the channel information determination unit 43, the control information restoration unit 45, and the data information restoration unit 46 (step 31).

The channel information determination unit 43 determines the weight information  $V(k_u)$  and channel status information  $\Lambda(k_u)$  that

maximize throughput based on the first characteristics  $H(k_u)$ , which have been compressed to be fed back, and outputs the determined weight information  $V(k_u)$  and channel status information  $\Lambda(k_u)$  to the information feedback unit 44 (step 32). The weight information  $V(k_u)$  and channel status information  $\Lambda(k_u)$  are determined by decomposing the first characteristics  $H(k_u)$  into  $U(k_u)\Lambda(k_u)V^H(k_u)$  using a singular value decomposition method.

$N_B(k_u)$  is smaller than or equal to  $B$  and greater than or equal to 1, and the number of vectors and the number of gain values in a basis matrix are both smaller than or equal to  $B$ . This is conceptually the same as when some gain values become null ( $=0$ ) depending on the first characteristics  $H(k_u)$ , which are the downlink channel characteristics of the base station/mobile station antennas. In both the cases, the number of vectors in the basis matrix and the number of gain values may be expressed as  $N_B(k_u)$ .

The information feedback unit 44 converts the weight information  $V(k_u)$  and channel status information  $\Lambda(k_u)$  received from the channel information determination unit 43 into feedback signals that are suitable to be fed back to the base station 11 using a general communication signal processing technique and transmits the converted feedback signals via the mobile station antenna array 41 to the base station 11 (step 33). To perform step 33, the information feedback unit 44 may format the weight information  $V(k_u)$  and channel status information  $\Lambda(k_u)$  received from the channel information determination unit 43, time-division-multiplex the formatted results, and transmit the time-division-multiplexed results as the feedback signals via the mobile station antenna array 41 to the base station 11. Alternatively, the information feedback unit 44 may apply code division multiplexing or frequency division multiplexing, instead of time division multiplexing, to

the formatted weight information  $V(k_u)$  and channel status information  $\Lambda(k_u)$  to generate the feedback signals.

The control information restoration unit 45 compensates for a distortion of the first control signal, which has been received through the mobile station antenna array 41 from the base station 11, using the first characteristics  $H(k_u)$  input from the channel characteristics measurement unit 42, restores a second control signal from the distortion-compensated first control signal, and outputs the restored second control signal to the data information selection unit 80 (step 34).

10 The second control signal includes information as to whether the data signals received by the mobile station are assigned thereto and information on a basis from which the mobile station receives the data signals. The second control signal may be restored from the first control signal using a general multi-antennal signal process, which will be

15 also used in step 35 described later.

The data information restoration unit 46 restores data information that is received from all bases from the data signals received through the mobile station antenna array 41 from the base station 11 and the first characteristics  $H(k_u)$  input from the channel characteristics measurement unit 42 and outputs the restored data information to the data information selection unit 47 (step 35). The data signals received from the base station 11 are expressed as  $r(k)$  in equation (2) below and can be modelled using equation (3) below.

20

$$25 \quad r(k) = [r(1,k) \ r(2,k) \ \dots \ r(N,k)]^T \quad \dots(2)$$

where  $r(n,k)$  denotes a data signal received via an  $n^{\text{th}}$  antenna of the  $K^{\text{th}}$  mobile station.



$$r(k) = H(k)x + n(k) = U(k)\Lambda(k)V^H(k)x + n(k) \quad \dots(3)$$

where  $n(k)$  denotes a noise component, and  $U(k)\Lambda(k)V^H(k)$  is the result of singular value decomposition (SVD), which is a general matrix operation, on the first characteristics  $H(k_u)$ , and  $x$  is modelled as in equation (4) below. SVD in multi-antenna systems is described in an article entitled "Fading Correlation and Its effect on the Capacity of Multielement Antenna Systems" by *Da-Shan Shiu, Gerard J. Foschini, Michael J. Gans, and Josep M. Kahn*, IEEE Transactions on Comm. Vol. 48, No. 3, 502-513, March 2003.

$$x = Wd \quad \dots(4)$$

where  $W$  is an optimal basis matrix generated in the base station and  $d$  denotes data information.

Referring back to FIGS. 3 and 4, the data information selection unit 47 selects data information which is received from a desired basis among the data information from every basis, which is received from the data information restoration unit 46, in response to the second control signal, and outputs  $N_e(k)$  data information values received from the desired basis, where  $0 \leq N_e(i) \leq N$ , to the data information combination unit 48 (step 36).

The data information combination unit 48 combines the selected data information values output from the data information selection unit 47 over a predetermined period of time  $T_{BLOCK}$  that corresponds to the length of a frame, and outputs the combined result as a high-speed downlink shared channel signal HS-DSCH(i)' of the corresponding mobile station (step 37).

Unlike the embodiment of step 21 illustrated in FIG. 3, steps 34

and 37 may be performed while steps 32 and 33 are performed.

Alternatively, steps 34 through 37 may precede steps 32 and 33.

Embodiments of the base station 11 in FIG. 1 and step 23 in FIG. 2 according to the present invention will now be described with reference  
5 to FIGS. 5 and 6.

FIG. 5 is a flowchart illustrating an embodiment of step 23 in FIG. 2 according to the present invention, which includes generating the downlink investigation information and downlink tracking information based on the restored weight information and channel status information  
10 (steps 51 through 53), selecting data regarding desired mobile stations (step 54), processing the selected data based on the downlink tracking information to generate data signals (step 55), and adding mobile station selection information contained in the downlink investigation information, and pilot channel signals to the data signals and transmitting the added  
15 results to the corresponding mobile station (step 56).

In another embodiment of step 23, step 53 may be not performed. In other words, step 23 may include generating the downlink investigation information based on the restored weight information and channel status information (steps 51 and 52), selecting data regarding  
20 desired mobile stations (step 54), processing the selected data based on the mutual weight information contained in the downlink investigation information to generate data signals (step 55), adding mobile station selection information contained in the downlink investigation information, and pilot channel signals to the data signals, and transmitting the added  
25 results to the corresponding mobile station (step 56).

In another embodiment of step 23 in FIG. 2, when generating the downlink investigation information in step 52 in each of the above embodiments, mobile station fairness information, i.e., packet fairness information between mobile stations, may be further considered.

30 FIG. 6 is a block diagram of an embodiment of the base station 11

in FIG. 1 according to the present invention. As illustrated in FIG. 6, the base station 11 may include an antenna array 61, a feedback information restoration unit 62, a decomposition unit 63, a mobile station fairness control unit 64, a downlink investigation information generation unit 65, a  
 5 downlink tracking information generation unit 66, a mobile station data selection unit 67, a basis multiplication unit 68, and an addition unit 69. The mobile station fairness control unit 64 is optional.

The operation of the base station 11 in FIG. 6 will be described in connection with the flowchart of FIG. 5.

10 In FIG. 6, the antenna array 61 includes N base station antennas 61a, 61b, ..., and 61c. The antenna array 61 receives the feedback signals contained in uplink dedicated physical control channel signals (HS-DPCCH) that are transmitted from the first through  $K^{\text{th}}$  mobile stations 13 through 17 and transmits the results of adding the mobile  
 15 station selection information and pilot channel signals to data signals, which are spatially processed HS-DSCH signals, to the first through  $K^{\text{th}}$  mobile stations 13 through 17.

The feedback information restoration unit 62 restores the weight information  $\mathbf{V}(k_u)$  and channel status information  $\mathbf{\Lambda}(k_u)$  from the  
 20 feedback signals received through the base station antenna array 61 from the first through  $K^{\text{th}}$  mobile stations 13 through 17 and outputs the restored weight information  $\mathbf{V}(k_u)$  and channel status information  $\mathbf{\Lambda}(k_u)$  to the decomposition unit 63.

The decomposition unit 63 decomposes the weight information  
 25  $\mathbf{V}(k_u)$  and channel status information  $\mathbf{\Lambda}(k_u)$ , which are matrices, into weight vectors  $\mathbf{v}(k)$  and channel status vectors  $\boldsymbol{\lambda}(k)$  and outputs the decomposed weight vectors  $\mathbf{v}(k)$  and channel status vectors  $\boldsymbol{\lambda}(k)$  to the downlink investigation information generation unit 65 and the downlink tracking information generation unit 66 (step 51). The restored

weight vectors  $\mathbf{V}(k_u)$  for the individual mobile stations are expressed as  $\mathbf{V}(k_u) = \{\mathbf{v}_1, \mathbf{v}_2, \dots, \mathbf{v}_K\}$ , and the restored channel status information  $\Lambda(k_u)$  for the individual mobile stations are expressed as  $\Lambda(k_u) = \{\lambda_1, \lambda_2, \dots, \lambda_K\}$ .

5 In a case where the information feedback unit 44 in FIG. 4 has generated the feedback signals using time division multiplexing, the feedback information restoration unit 62 restores the weight information  $\mathbf{V}(k_u)$  and channel status information  $\Lambda(k_u)$  using time division demultiplexing. In a case where the information feedback unit 44 has  
 10 generated the feedback signals using code division multiplexing or frequency division multiplexing, instead of time division multiplexing, the feedback information restoration unit 62 restores the weight information  $\mathbf{V}(k_u)$  and channel status information  $\Lambda(k_u)$  using code division demultiplexing or frequency division demultiplexing.

15 The mobile station fairness control unit 64 generates mobile station fairness information  $\{\mathbf{t}_k\}$  regarding the individual mobile stations and outputs the mobile station fairness information  $\{\mathbf{t}_k\}$  to the downlink investigation information generation unit 65. The mobile station fairness information  $\{\mathbf{t}_k\}$  may be generated in consideration of maximum  
 20 transmission channel capacity  $C_{\text{MAX}}$ . The mobile station fairness information  $\{\mathbf{t}_k\}$  consists of packet fairness information regarding each of the mobile stations, which is expressed as  $\{\mathbf{t}_k\} = \{\mathbf{t}_1, \mathbf{t}_2, \dots, \mathbf{t}_K\}$ . A technique of generating the mobile station fairness information  $\{\mathbf{t}_k\}$  is disclosed by *Paramod Viswanath, David N.C. Tse, and Rajiv Laroia* in an  
 25 article entitled "Opportunistic Beamforming Using Dumb Antennas", IEEE Transactions on Information Theory, Vol. 48, No. 6, page 1277-1294.

In an investigation section prior to packet transmission to the mobile stations, the downlink investigation information generation unit 65

generates downlink investigation information based on the restored weight vectors  $\mathbf{v}(k)$  and channel status vectors  $\lambda(k)$  input from the feedback information restoration unit 62 and the mobile station fairness information  $\{t_k\}$  input from the mobile station fairness control unit 62, and outputs maximum index information  $i_{MAX}$ , which is mobile station selection information contained in the downlink investigation information, to the downlink tracking information generation unit 66, the mobile station data selection unit 67, and the addition unit 69 (step 52). The maximum index information  $i_{MAX}$  consists of  $i_{USER}(1)$ ,  $i_{USER}(2)$ , ..., and  $i_{USER}(N_B)$ .

10 The maximum transmission channel capacity information  $C_{MAX}$  contained in the downlink investigation information is provided to the mobile station fairness control unit 64.

In a tracking section for packet transmission to the mobile stations, the downlink tracking information generation unit 66 generates mutual weight information  $\mathbf{W}$  based on the restored weight vectors and channel status vectors input from the feedback information restoration unit 62 and the maximum index information  $i_{MAX}$ , which is mobile station selection information contained in the downlink investigation information, input from the downlink investigation information generation unit 65, and outputs the generated mutual weight information  $\mathbf{W}$  to the basis multiplication unit 68 (step 53).

The mobile station data selection unit 67 selects packet channels connected to the mobile stations selected for data transmission, from among the packet channels HS-DSCH(k) for all of the mobile stations, in response to the maximum index information  $i_{MAX}$  that is mobile station selection information input from the downlink investigation information generation unit 65, and outputs the packet channels connected to the selected mobile stations to the basis multiplication unit 68 (step 54).

The basis multiplication unit 68 performs matrix-multiplication operation on a set of mutual weight information  $\{\mathbf{W}\}$  output from the

downlink tracking information generation unit 66 and data regarding N mobile stations selected by the mobile station data selection unit 67 and outputs the results of the matrix-multiplication to the addition unit 69 as data signals (step 55). Matrix-multiplication includes multiplying the  
 5 mutual weight information  $\mathbf{W}$  by the data regarding N mobile stations selected by the mobile station data selection unit 67 and summing all of the products.

The addition unit 69 adds externally input pilot channel signals  $PICH_1, PICH_2, \dots$ , and  $PICH_N$  to the data signals input from the basis  
 10 multiplication unit 68 and outputs the added results to the base station antenna array 61 (step 56). To this end, the addition unit 69 is implemented with first through  $N^{\text{th}}$  adders (not shown). An  $N^{\text{th}}$  adder (not shown) adds a pilot channel signal  $PICH_n$  to a data signal input from the basis multiplication unit 68 and outputs the added result to a  
 15 corresponding antenna 61a, 61b, ..., or 61c in the base station antenna array 61. The added result input to the base station antenna array 61 from the addition unit 69 is transmitted to the mobile stations 13 through 17 in units of a frame.

In another embodiment of the base station 11, the downlink  
 20 tracking information generation unit 66 described above may be excluded. In this case, in an investigation section prior to packet transmission to the mobile stations, the downlink investigation information generation unit 65 generates downlink investigation information based on the restored weight vectors  $\mathbf{v}(k)$  and channel  
 25 status vectors  $\lambda(k)$  input from the feedback information restoration unit 62 and the mobile station fairness information  $\{\mathbf{t}_k\}$  input from the mobile station fairness control unit 62. The maximum index information  $i_{\text{MAX}}$ , which is mobile station selection information contained in the downlink investigation information, is output to the mobile station data  
 30 selection unit 67 and the addition unit 69. The maximum transmission

channel capacity information  $C_{MAX}$  contained in the downlink investigation information is output to the mobile station fairness control unit 64. The mutual weight information  $W_{MAX}$  contained downlink investigation information is output to the basis multiplication unit 68. As  
5 in the preceding embodiment, the mobile station fairness control unit 64 is optional.

Embodiments of Step 52 in FIG. 5 and the downlink investigation information generation unit 65 in FIG. 6 according to the present invention will be described with reference to FIGS. 7 and 8.

10 FIG. 7 is a flowchart illustrating an embodiment of step 52 in FIG. 5, which includes generating downlink investigation information based on the restored weight information and channel status information and the mobile station fairness information (steps 71 through 79). In another embodiment, the downlink investigation information may be generated  
15 based on only the restored weight information and channel status information.

FIG. 8 is a block diagram illustrating the structure of the downlink investigation information generation unit 65 of FIG. 6 according to an embodiment of the present invention, which includes a multiplication  
20 portion 810, a sub-part combination portion 820, a mutual weight information generation portion 830, a channel capacity calculation portion 840, a storage portion 850, an index setting portion 860, and a maximum values search portion 870. The sub-part combination portion 820 may be implemented with a channel information sub-part  
25 combination portion 820 and a mobile station fairness information sub-part combination portion 822. Alternatively, the sub-part combination portion 820 may be implemented with the channel information sub-part combination portion 820 alone. The index setting portion 860 may be implemented with a delay 861 and a counter 862.

30 The operation of the downlink investigation information generation

unit 65 in FIG. 8 will be described with reference to the flowchart in FIG. 7.

The multiplication portion 810 multiplies the weight information vector  $\{v(k)\}$  by the channel status information vector  $\{\lambda(k)\}$ , as  
 5 expressed in equation (5), and outputs the product  $\{h_k\}$  to the channel information sub-part combination portion 821 of the sub-part combination unit 820 (step 71). If the available channel capacity  $(\log_2(1+\lambda(k))/t_k)$  of a mobile station, which is a ratio of the channel capacity  $(\log_2(1+\lambda(k)))$  converted from the corresponding channel status information vector  
 10  $\lambda(k)$  to the corresponding mobile station fairness information  $t_k$ , is smaller than a predetermined threshold value, data transmission to the mobile station is improbable. Therefore, it is unnecessary to perform multiplication itself for such mobile stations.

$$15 \quad h_k = \lambda(k) * v(k) \quad \dots(5)$$

The counter 862 in the index setting portion 860 increases the index (i) one by one, wherein the index (i) is initialized to 1 (step 72). The index (i) indicates the number of all possible combinations of the first  
 20 through  $K^{\text{th}}$  mobile stations 13 through 17. The maximum value of the index (i) is  ${}_k C_{\min(K,N)}$ .

The channel information sub-part combination portion 821 of the sub-part combination unit 820 combines the product  $\{h_k\}$  output from the multiplication portion 810 into sub-parts as expressed in equation (6)  
 25 with reference to the index (i) provided by the counter 861 and outputs the combined result  $H_i$  to the mutual weight information generation unit 830. The mobile station fairness information sub-part combination portion 822 combines the mobility station fairness information  $\{t_k\}$  into



sub-parts for the individual mobile stations as expressed in equation (7) and outputs the combined result  $\mathbf{T}_s$  to the channel capacity calculation unit 840 (step 73).

$$\mathbf{H}_s = [\mathbf{h}_{k(1)} \quad \mathbf{h}_{k(2)} \quad \dots \quad \mathbf{h}_{k(N_B)}], \quad k(n_B) \in \{1, 2, \dots, K\} \quad \dots(6)$$

$$\mathbf{T}_s = [t_{k(1)} \quad t_{k(2)} \quad \dots \quad t_{k(N_B)}], \quad k(n_B) \in \{1, 2, \dots, K\} \quad \dots(7)$$

The mutual weight information generation unit 830 generates the float point mutual weight information  $\mathbf{W}$  based on the combined result  $\mathbf{H}_s$  received from the channel information sub-part combination portion 821 using equation (8) and outputs the generated mutual weight information  $\mathbf{W}$  to the channel capacity calculation portion 840 (step 74).

To make it easier to measure the channel information, the mutual weight information  $\mathbf{W}$  may be quantized to a degree that is suitable to be fed back and then output to the channel capacity calculation portion 840.

$$\mathbf{W} = \mathbf{H}_s^H (\mathbf{H}_s \mathbf{H}_s^H + N_o / E_b)^+ \quad \dots(8)$$

20

The channel capacity calculation portion 840 calculates the transmission channel capacity  $C$  based on the result of combining the channel information,  $\mathbf{H}_s$ , and the result of combining the mobile station fairness information,  $\mathbf{T}_s$ , which are received from the sub-part combination unit 820, and the mutual weight information  $\mathbf{W}$  received from the mutual weight information generation portion 830 using equation (9) below, and outputs the calculated transmission channel capacity  $C$  to the storage portion 850 (step 75).

$$C = \sum_{n_B=1}^{N_B} \frac{1}{t_{k(n_B)}} \log_2 \left( 1 + \frac{E_b |\mathbf{w}_{n_B}^H \mathbf{h}_{k(n_B)}|}{E_b \sum_{n=1, n \neq n_B}^{N_B} |\mathbf{w}_n^H \mathbf{h}_{k(n_B)}| + N_o} \right) \quad \dots(9)$$

where  $\mathbf{W} = [\mathbf{w}_1, \mathbf{w}_2, \dots, \mathbf{w}_{N_B}]$ .

Alternatively, the mobile station fairness information may be not  
5 considered by substituting the term  $t_k$  in equation (9) with 1.

The storage portion 850 stores the transmission channel capacity  $C$  output from the channel capacity calculation portion 840, the mutual weight information  $\mathbf{W}$  output from the mutual weight information generation unit 830, and the index (i) output from the counter 862 till the  
10 index (i) input from the counter 862 is not greater than  $\sum_{n_B=1}^{\min(K,N)} K C_{n_B}$  (step 76).

The storage portion 850 determines whether the index (i) received from the counter 862 is greater than  $\sum_{n_B=1}^{\min(K,N)} K C_{n_B}$  (step 77). If the

currently received index (i) is determined to be greater than  $\sum_{n_B=1}^{\min(K,N)} K C_{n_B}$ ,  
15 the storage portion 850 outputs a set of the indices  $\{i\}$  from the first index, i.e., 1, to the last index just preceding the current received index (i), the transmission channel capacity  $\{C\}$ , and the mutual weight information  $\{\mathbf{W}\}$  to the maximum values search portion 870. The storage portion 850 outputs to the delay 861 a signal that instructs the  
20 counter 862 to increase the index (i) by one. The delay 861 delays the instruction signal for a predetermined clock period and outputs the delayed instruction signal to the counter 862.

The counter 862 increases the index (i) by one in response to the

index increasing signal and outputs the increased index to the sub-part combination unit 820 and the storage portion 850 (step 78).

If the index (i) received from the counter 862 is greater than

$\sum_{n_B=1}^{\min(K,N)} K C_{n_B}$ , the maximum values search unit 870 searches input data

- 5 values  $i_{MAX}$ ,  $C_{MAX}$ , and  $W_{MAX}$  that result in maximum transmission channel capacity C in response to the input index  $\{i\}$  among the calculated transmission channel capacities for all possible combinations of the first through  $K^{th}$  mobile stations 13 through 17 and outputs the searched input data values  $i_{MAX}$ ,  $C_{MAX}$ , and  $W_{MAX}$  (step 79). The
- 10 maximum index value  $i_{MAX}$  that is a kind of mobile station selection information output from the maximum values search unit 870 is output to the downlink tracking information generation unit 65, the mobile station data selection unit 66, and the addition unit 68. Also, the maximum transmission channel capacity  $C_{MAX}$  and the mutual weight information
- 15  $W_{MAX}$  are transmitted to relevant upper layers.

Embodiments of step 53 in FIG. 5 and the downlink tracking information generation unit 66 in FIG. 6 according to the present invention will be described with reference to FIGS. 9 and 10.

- FIG. 9 is a flowchart of an embodiment of step 53 in FIG. 5
- 20 according to the present invention, which includes generating mutual weight information based on the restored weight vector  $\{v(k)\}$ , channel status vector  $\{\lambda(k)\}$ , and mobile station selection information  $i_{MAX}$  contained in the downlink investigation information (steps 91 through 93).

- FIG. 10 is a block diagram of an embodiment of the downlink
- 25 tracking information generation unit 66 in FIG. 6 according to the present invention. The downlink tracking information generation unit 66 of FIG. 10 includes a channel information sub-part selection portion 101, a multiplication portion 104, and a mutual weight information generation

portion 105. The channel information sub-part selection portion 101 includes a weight information sub-part selection portion 102 and a channel status information sub-part selection portion 103.

The operation of the downlink tracking information generation unit 66 in FIG. 10 will now be described in connection with the flowchart of FIG. 9.

The weight information sub-part selection portion 102 and the channel status information sub-part selection portion 103 in the channel information sub-part selection portion 101 select weight information and channel status information regarding the mobile stations that match the maximum index  $i_{MAX}$  input from the downlink investigation information generation unit 65, from among the restored weight information and channel status information input from the feedback information restoration unit 62, respectively, and outputs the selected weight information and channel status information, respectively, to the multiplication portion 104 (step 91).

The multiplication portion 104 multiplies the weight information and channel status information input from the channel information sub-part selection portion 101, as expressed in formula (5) above, and outputs the product  $h_k$ , where  $k = i_{MAX}$ , to the mutual weight information generation portion 105 (step 92).

The mutual weight information generation portion 104 generates the float point mutual weight information based on the product  $h_k$ , where  $k = i_{MAX}$ , input from the multiplication unit 104 using equation (8) above and outputs the generated mutual weight information  $W$  to the basis multiplication unit 68 (step 93). To make it easier to measure the channel information, the generated mutual weight information may be quantized to a degree that is suitable to be fed back prior to being output to the basis multiplication unit 67.

### Industrial Applicability

As described above, in a mobile communication apparatus using multiple base station and mobile station antennas and a mobile communication method used therein according to the present invention,  
5 downlink characteristics information transmitted from every mobile station to the base station is considered to achieve optimal beamforming and efficient data transmission at a low cost with a nominal peak throughput for multi-antennal communications.

Channel weight information and channel status information  
10 regarding every mobile station, which are transmitted from the mobile stations to the base station as feedback signals, are utilized. In addition, since channel investigation and tracking sections are separated in the present invention, so that the problem of delay in high-speed Doppler environments can be solved.

15 Furthermore, packet fairness information regarding a plurality of mobile stations is considered in calculating maximum transmission channel capacities, enabling selecting mobile stations for simultaneous data transmission.

Mutual weight information generated through investigation and  
20 tracking sections is quantized, allowing efficient channel information measurement. Generating channel information based on the channel weight information and channel status information regarding each of the mobile stations in the present invention ensures compatibility with existing standard protocols.

What is claimed is:

1. A mobile communication apparatus with multiple base station/mobile station antennas, the apparatus including a base station and at least two mobile stations, comprising:
  - 5 the base station restoring weight information and channel status information from feedback signals received from the mobile stations, determining downlink investigation information that results in maximum transmission channel capacity based on the restored weight information and channel status information, selecting mobile stations for
  - 10 simultaneous transmission from among all of the mobile stations based on the downlink investigation information, and processing data to be transmitted to the selected mobile stations based on the downlink investigation information, wherein the base station includes at least two base station antennas and each of the mobile stations includes at least
  - 15 one mobile station antenna.
2. The mobile communication apparatus of claim 1, wherein the maximum transmission channel capacity is calculated in consideration of packet fairness between the mobile stations.
- 20 3. The mobile communication apparatus of claim 1, wherein each of the mobile stations measures downlink characteristics of multiple base station/mobile station antenna channels based on pilot channel signals transmitted from the base station, determines the weight
- 25 information and channel status information based on the downlink characteristics, converts the determined weight information and channel status information into the feedback signals, transmits the feedback signals to the base station, and detects high-speed downlink shared channel (HS-DSCH) signals in units of a frame based on the downlink
- 30 characteristics, and a first control signal and data signals, which are

transmitted from the base station.

4. The mobile communication apparatus of claim 1, wherein the base station comprises:

- 5 a feedback information restoration unit that restores the weight information and channel status information received from each of the mobile stations through the base station antennas and outputs the restored weight information and channel status information;
- a downlink investigation information generation unit that generates
- 10 the downlink investigation information based on the restored weight information and channel status information in an investigation section prior to packet transmission to mobile stations;
- a mobile station data selection unit that selects data regarding the mobile stations for simultaneous transmission from among data
- 15 regarding all of the mobile stations based on the downlink investigation information received from the downlink investigation information generation unit;
- a basis multiplication unit that performs matrix-multiplication and summation on the data regarding the mobile stations for simultaneous
- 20 transmission, which are selected by the mobile station data selection unit, and the downlink investigation information, and outputs the results as data signals; and
- an addition unit that adds pilot channel signals to the data signals and downlink investigation information, and outputs the added results,
- 25 wherein the added results are transmitted in units of a frame through the base station antennas to the mobile stations.

5. The mobile communication apparatus of claim 4, wherein the base station further comprises a mobile station fairness control unit

30 that generates mobile station fairness information and outputs the mobile

station fairness information to the downlink investigation information generation unit.

6. The mobile communication apparatus of claim 4, wherein  
5 the downlink investigation information generation unit comprises:
- a multiplication portion that generates channel information by multiplying the restored weight information and channel status information received from the feedback information restoration unit;
  - an index setting portion that indices all possible combinations of  
10 the mobile stations;
  - a sub-part combination portion that combine the channel information into sub-parts with reference to the indices assigned by the index setting portion;
  - a mutual weight information generation portion that generates  
15 mutual weight information based on the results of the combination performed in the sub-part combination portion;
  - a channel capacity calculation portion that calculate transmission channel capacities based on the results of the combination received from the sub-part combination portion and the mutual weight information  
20 received from the mutual weight information generation portion;
  - a storage portion that stores the transmission channel capacities regarding all of the mobile stations, which are output from the channel capacity calculation portion, the mutual weight information output from the mutual weight information generation portion, and the indices  
25 received from the index setting portion; and
  - a maximum values search unit that compares the transmission channel capacities stored in the storage portion and extract indices that correspond to the maximum transmission channel capacity.

- 30 7. The mobile communication apparatus of claim 5, wherein



the downlink investigation information generation unit comprises:

a multiplication portion that generates channel information by multiplying the restored weight information and channel status information received from the feedback information restoration unit;

5 an index setting portion that indices all possible combinations of the mobile stations;

a sub-part combination portion that combine the channel information and mobile station fairness information into sub-parts with reference to the indices assigned by the index setting portion;

10 a mutual weight information generation portion that generates mutual weight information based on the results of the combination performed in the sub-part combination portion;

a channel capacity calculation portion that calculate transmission channel capacities based on the results of the combination received from the sub-part combination portion and the mutual weight information received from the mutual weight information generation portion;

15 a storage portion that stores the transmission channel capacities regarding all of the mobile stations, which are output from the channel capacity calculation portion, the mutual weight information output from the mutual weight information generation portion, and the indices received from the index setting portion; and

20 a maximum values search unit that compares the transmission channel capacities stored in the storage portion and extract indices that correspond to the maximum transmission channel capacity.

25

8. The mobile communication apparatus of claim 4 or 5, wherein the mutual weight information is quantized to a degree that is suitable to be fed back and then provided to the channel capacity calculation portion.

30

9. A mobile communication apparatus with multiple base station/mobile station antennas, the apparatus including a base station and at least two mobile stations, comprising:

the base station restoring weight information and channel status  
5 information from feedback signals received from the mobile stations,  
determining downlink investigation information that results in maximum  
transmission channel capacity based on the restored weight information  
and channel status information, selecting mobile stations for  
simultaneous transmission from among all of the mobile stations based  
10 on the downlink investigation information, determining downlink tracking  
information based on the channel downlink investigation information and  
restored weight information and channel status information regarding the  
selected mobile stations, and processing data to be transmitted to the  
selected mobile stations based on the downlink tracking information,  
15 wherein the base station includes at least two base station antennas and  
each of the mobile stations includes at least one mobile station antenna.

10. The mobile communication apparatus of claim 9, wherein  
the maximum transmission channel capacity is calculated in  
20 consideration of packet fairness between the mobile stations.

11. The mobile communication apparatus of claim 9, wherein  
each of the mobile stations measures downlink characteristics of multiple  
base station/mobile station antenna channels based on pilot channel  
25 signals transmitted from the base station, determines the weight  
information and channel status information based on the downlink  
characteristics, converts the determined weight information and channel  
status information into the feedback signals, transmits the feedback  
signals to the base station, and detects high-speed downlink shared  
30 channel (HS-DSCH) signals in units of a frame based on the downlink

characteristics, and a first control signal and data signals, which are transmitted from the base station.

12. The mobile communication apparatus of claim 9, wherein  
5 the base station comprises:

a feedback information restoration unit that restores the weight information and channel status information received from each of the mobile stations through the base station antennas and outputs the restored weight information and channel status information;

10 a downlink investigation information generation unit that generates the downlink investigation information based on the restored weight information and channel status information in an investigation section prior to packet transmission to mobile stations;

a downlink tracking information generation unit that generates the  
15 downlink tracking information based on the restored weight information and channel status information and the downlink investigation information received from the downlink investigation information generation unit in a tracking section for packet transmission to the mobile stations;

20 a mobile station data selection unit that selects data regarding the mobile stations for simultaneous transmission from among data regarding all of the mobile stations based on the downlink investigation information received from the downlink investigation information generation unit;

25 a basis multiplication unit that performs matrix-multiplication and summation on the data regarding the mobile stations for simultaneous transmission, which are selected by the mobile station data selection unit, and the downlink tracking information output from the downlink tracking information generation unit, and outputs the results as data signals; and

30 an addition unit that adds pilot channel signals to the data signals

and downlink investigation information, and outputs the added results,  
wherein the added results are transmitted in units of a frame  
through the base station antennas to the mobile stations.

5           13.    The mobile communication apparatus of claim 12, wherein  
the base station further comprises a mobile station fairness control unit  
that generates mobile station fairness information and outputs the mobile  
station fairness information to the downlink investigation information  
generation unit.

10

14.    The mobile communication apparatus of claim 12, wherein  
the downlink investigation information generation unit comprises:

          a multiplication portion that generates channel information by  
multiplying the restored weight information and channel status  
15 information received from the feedback information restoration unit;  
          an index setting portion that indices all possible combinations of  
the mobile stations;

          a sub-part combination portion that combine the channel  
information into sub-parts with reference to the indices assigned by the  
20 index setting portion;

          a mutual weight information generation portion that generates  
mutual weight information based on the results of the combination  
performed in the sub-part combination portion;

          a channel capacity calculation portion that calculates transmission  
25 channel capacities based on the results of the combination received from  
the sub-part combination portion and the mutual weight information  
received from the mutual weight information generation portion;

          a storage portion that stores the transmission channel capacities  
regarding all of the mobile stations, which are output from the channel  
30 capacity calculation portion, the mutual weight information output from

the mutual weight information generation portion, and the indices received from the index setting portion; and

5 a maximum values search unit that compares the transmission channel capacities stored in the storage portion and extract indices that correspond to the maximum transmission channel capacity.

15. The mobile communication apparatus of claim 13, wherein the downlink investigation information generation unit comprises:

10 a multiplication portion that generates channel information by multiplying the restored weight information and channel status information received from the feedback information restoration unit;

an index setting portion that indices all possible combinations of the mobile stations;

15 a sub-part combination portion that combine the channel information and mobile station fairness information into sub-parts with reference to the indices assigned by the index setting portion;

a mutual weight information generation portion that generates mutual weight information based on the results of the combination performed in the sub-part combination portion;

20 a channel capacity calculation portion that calculates transmission channel capacities based on the results of the combination received from the sub-part combination portion and the mutual weight information received from the mutual weight information generation portion;

25 a storage portion that stores the transmission channel capacities regarding all of the mobile stations, which are output from the channel capacity calculation portion, the mutual weight information output from the mutual weight information generation portion, and the indices received from the index setting portion; and

30 a maximum values search unit that compares the transmission channel capacities stored in the storage portion and extract indices that

correspond to the maximum transmission channel capacity.

16. The mobile communication apparatus of claim 14 or 15,  
wherein the mutual weight information is quantized to a degree that is  
5 suitable to be fed back and then provided to the channel capacity  
calculation portion.

17. The mobile communication apparatus of claim 12, wherein  
the downlink tracking information generation unit comprises:  
10 a channel information sub-part selection portion that selects  
weight information and channel status information regarding mobile  
stations that correspond to the downlink investigation information  
received from the downlink investigation information generation unit from  
among the restored weight information and channel status information  
15 received from the feedback information restoration unit;  
a multiplication portion that multiplies the weight information and  
channel status information received from the channel information  
sub-part selection portion; and  
a mutual weight information generation portion that generates the  
20 downlink tracking information, which is mutual weight information, based  
on the product received from the multiplication portion.

18. The mobile communication apparatus of claim 17, wherein  
the mutual weight information is quantized to a degree that is suitable to  
25 be fed back.

19. The mobile communication apparatus of claim 3 or 11,  
wherein each of the mobile stations comprises:  
a channel characteristics measurement unit that measures the  
30 downlink characteristics based on the pilot channel signals received

through the mobile station antenna;

a channel information determination unit that determines weight information and channel status information that maximizes transmission capacity based on the downlink characteristics, which are compressed to  
5 be fed back;

an information feedback unit that converts the weight information and channel status information received from the channel information determination unit into the feedback signals and transmits the feedback signals through the mobile station antenna to the base station;

10 a control information restoration unit that compensates for a distortion of the first control signal received from the base station based on the downlink characteristics and restores a second control signal from the distortion-compensated first control signal, the second control signal including information as to whether the data signals are from a desired  
15 basis matrix and information on the number of bits included;

a data information restoration unit that restores data information that is received from every basis from the data signals received from the base station and the downlink characteristics;

a data information selection unit that selects data information  
20 received from the desired basis matrix from among the data information received from all of the basis matrices in response to the second control signal, and outputs the selected data information; and

a data information combination unit that combines the selected data information received from the data information selection unit and  
25 outputs the combined results as the high-speed downlink shared channel (HS-DSCH) signals.

20. A method of mobile communications between a base station and at least two mobile stations, wherein the base station  
30 includes at least two base station antennas, and each of the mobile

stations includes at least one mobile station antenna, the method comprising (a) the base station restoring weight information and channel status information from feedback signals received from the mobile stations, determining downlink investigation information that results in  
5 maximum transmission channel capacity based on the restored weight information and channel status information, selecting mobile stations for simultaneous transmission from among all of the mobile stations based on the downlink investigation information, and processing data to be transmitted to the selected mobile stations based on the downlink  
10 investigation information.

21. A method of mobile communications between a base station and at least two mobile stations, wherein the base station includes at least two base station antennas, and each of the mobile  
15 stations includes at least one mobile station antenna, the method comprising (a) the base station restoring weight information and channel status information from feedback signals received from the mobile stations, determining downlink investigation information that results in maximum transmission channel capacity based on the restored weight  
20 information and channel status information, selecting mobile stations for simultaneous transmission from among all of the mobile stations based on the downlink investigation information, determining downlink tracking information based on the channel downlink investigation information and restored weight information and channel status information regarding the  
25 selected mobile stations, and processing data to be transmitted to the selected mobile stations based on the downlink tracking information.

22. The method of claim 20 or 21, further comprising (b) each  
of the mobile stations measuring downlink characteristics of multiple  
30 base station/mobile station antenna channels based on pilot channel



signals transmitted from the base station, determining the weight information and channel status information based on the downlink characteristics, converting the determined weight information and channel status information into the feedback signals, transmitting the  
5 feedback signals to the base station, and detecting high-speed downlink shared channel (HS-DSCH) signals in units of a frame based on the downlink characteristics, and a first control signal and data signals, which are transmitted from the base station.

10           23.    The method of claim 20 or 21, wherein the maximum transmission channel capacity is calculated in consideration of packet fairness between the mobile stations.

              24.    The method of claim 20, wherein step (a) performed in the  
15 mobile station comprises:

- (a1) restoring the weight information and channel status information received from each of the mobile stations through the base station antennas;
- (a2) generating the downlink investigation information based on  
20 the restored weight information and channel status information;
- (a3) selecting data regarding the mobile stations for simultaneous transmission from among data regarding all of the mobile stations based on the downlink investigation information;
- (a4) performing matrix-multiplication and summation on the data  
25 regarding the mobile stations for simultaneous transmission and the downlink investigation information and determining the results as data signals; and
- (a5) adding pilot channel signals to the data signals and downlink investigation information, and transmitting the added results in units of a  
30 frame through the base station antennas to the mobile stations.

25. The method of claim 24, wherein step (a) further comprises (a6) generating mobile station fairness information that is considered when generating the downlink investigation information.

5

26. The method of claim 21, wherein step (a) performed in the base station comprises:

(a1) restoring the weight information and channel status information received from each of the mobile stations through the base station antennas;

(a2) generating the downlink investigation information based on the restored weight information and channel status information;

(a3) generating the downlink tracking information based on the downlink investigation information and the restored weight information and channel status information;

(a4) selecting data regarding the mobile stations for simultaneous transmission from among data regarding all of the mobile stations based on the downlink investigation information;

(a5) performing matrix-multiplication and summation on the data regarding the mobile stations for simultaneous transmission and the downlink tracking information, and determining the results as data signals; and

(a6) adding pilot channel signals to the data signals and downlink investigation information, and transmitting the added results in units of a frame through the base station antennas to the mobile stations.

25

27. The method of claim 26, wherein step (a) further comprises (a7) generating mobile station fairness information that is considered when generating the downlink investigation information.

30

FIG. 1



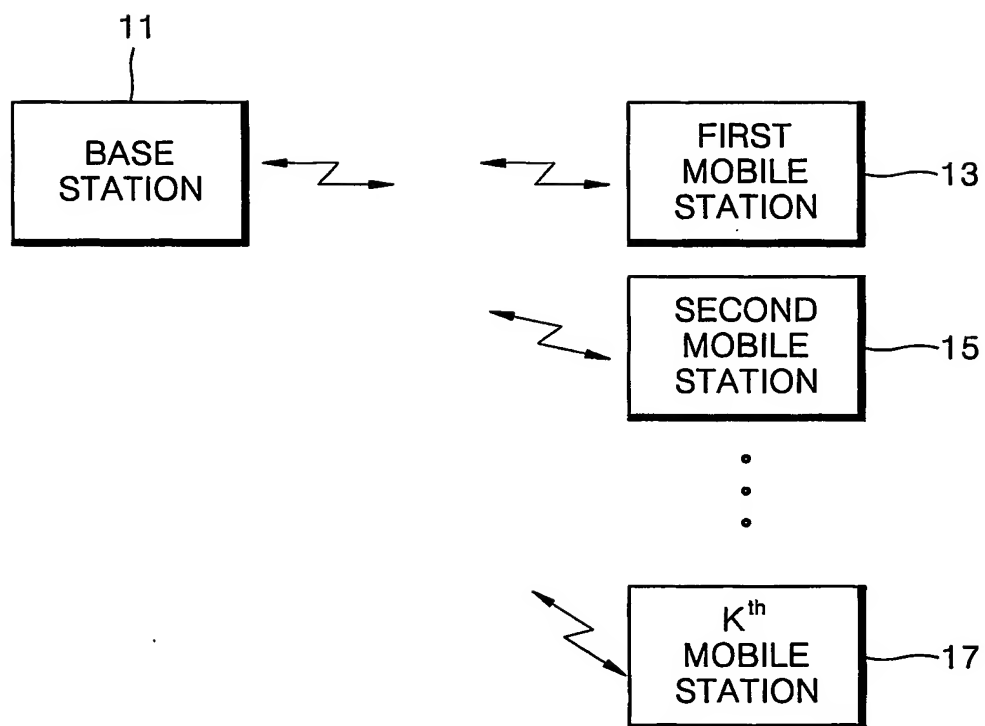


FIG. 2

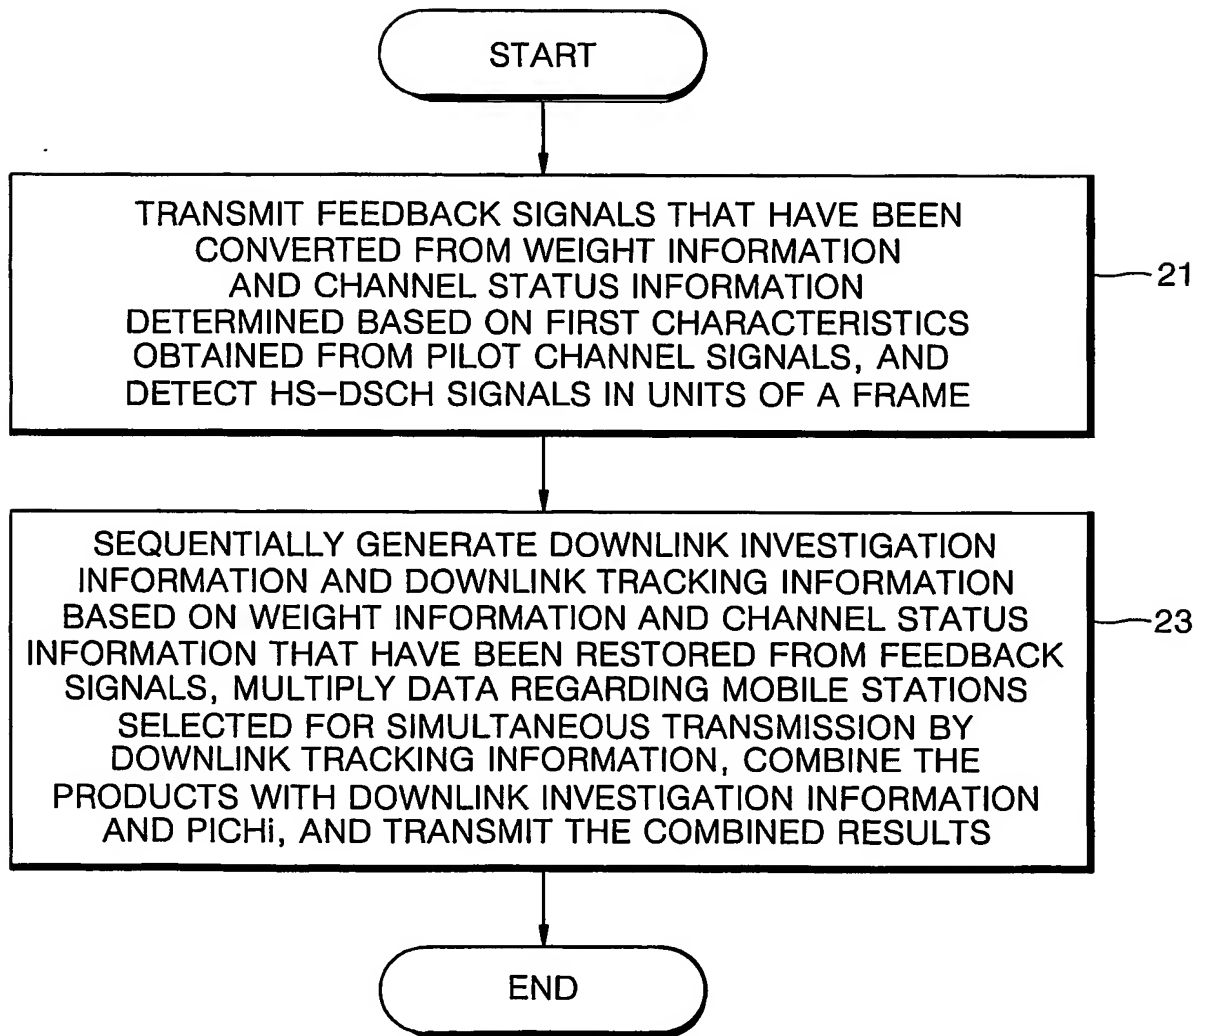


3/10

FIG. 3

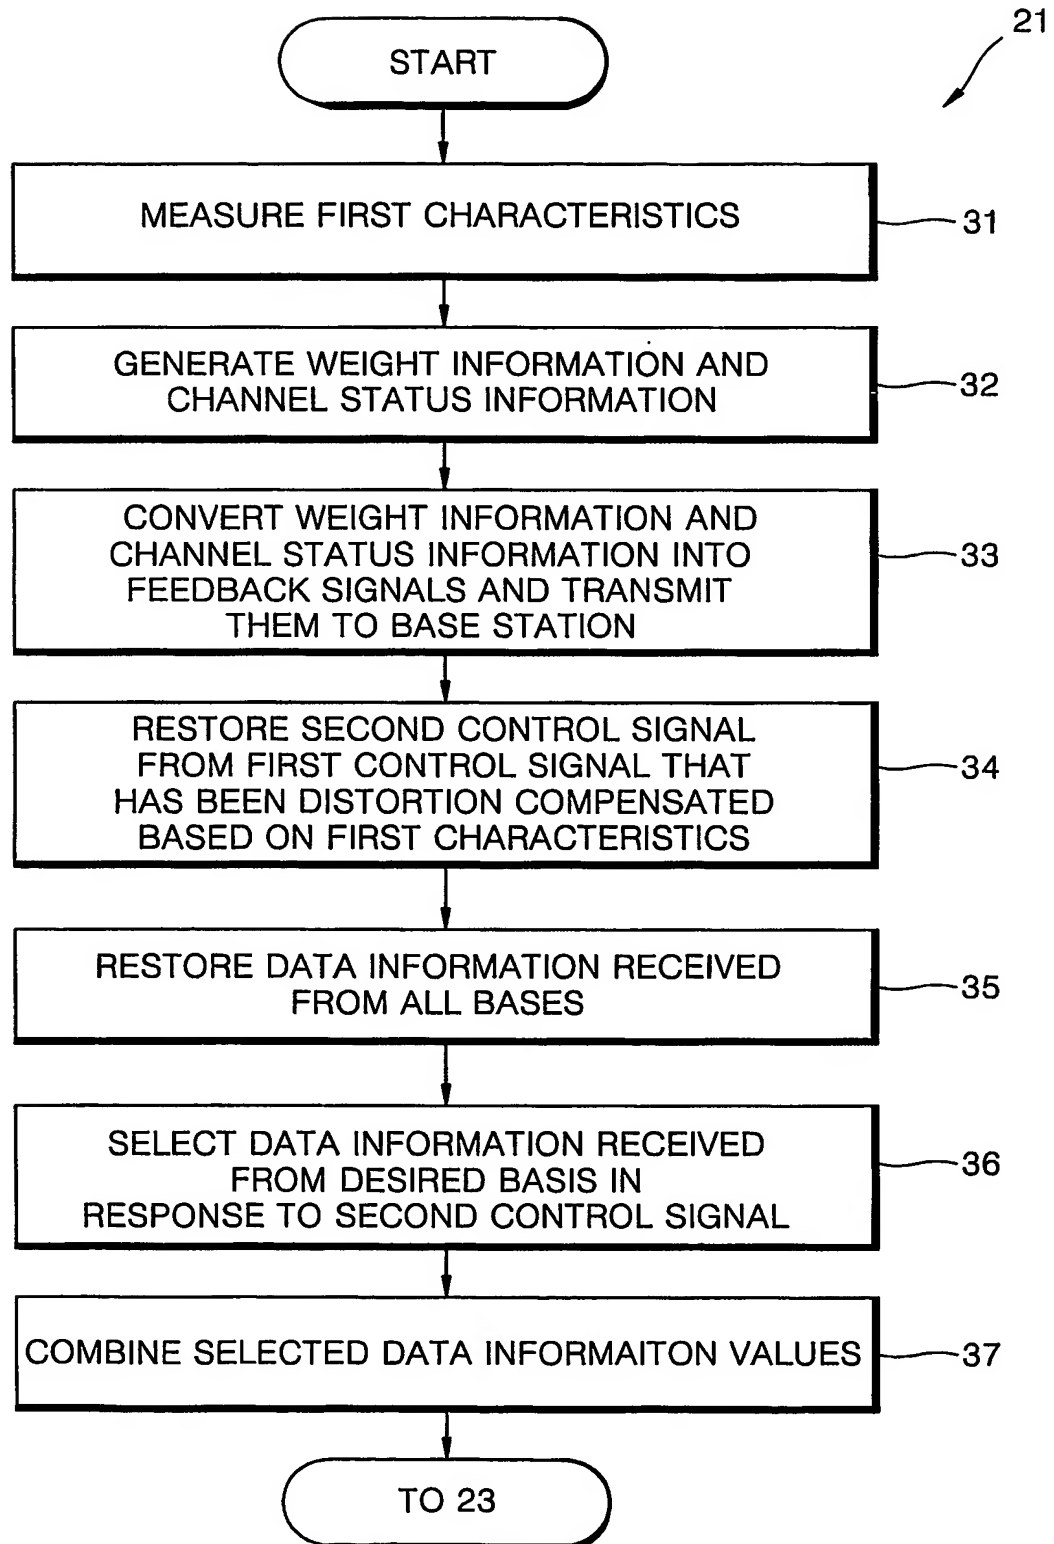

4/10

FIG. 4

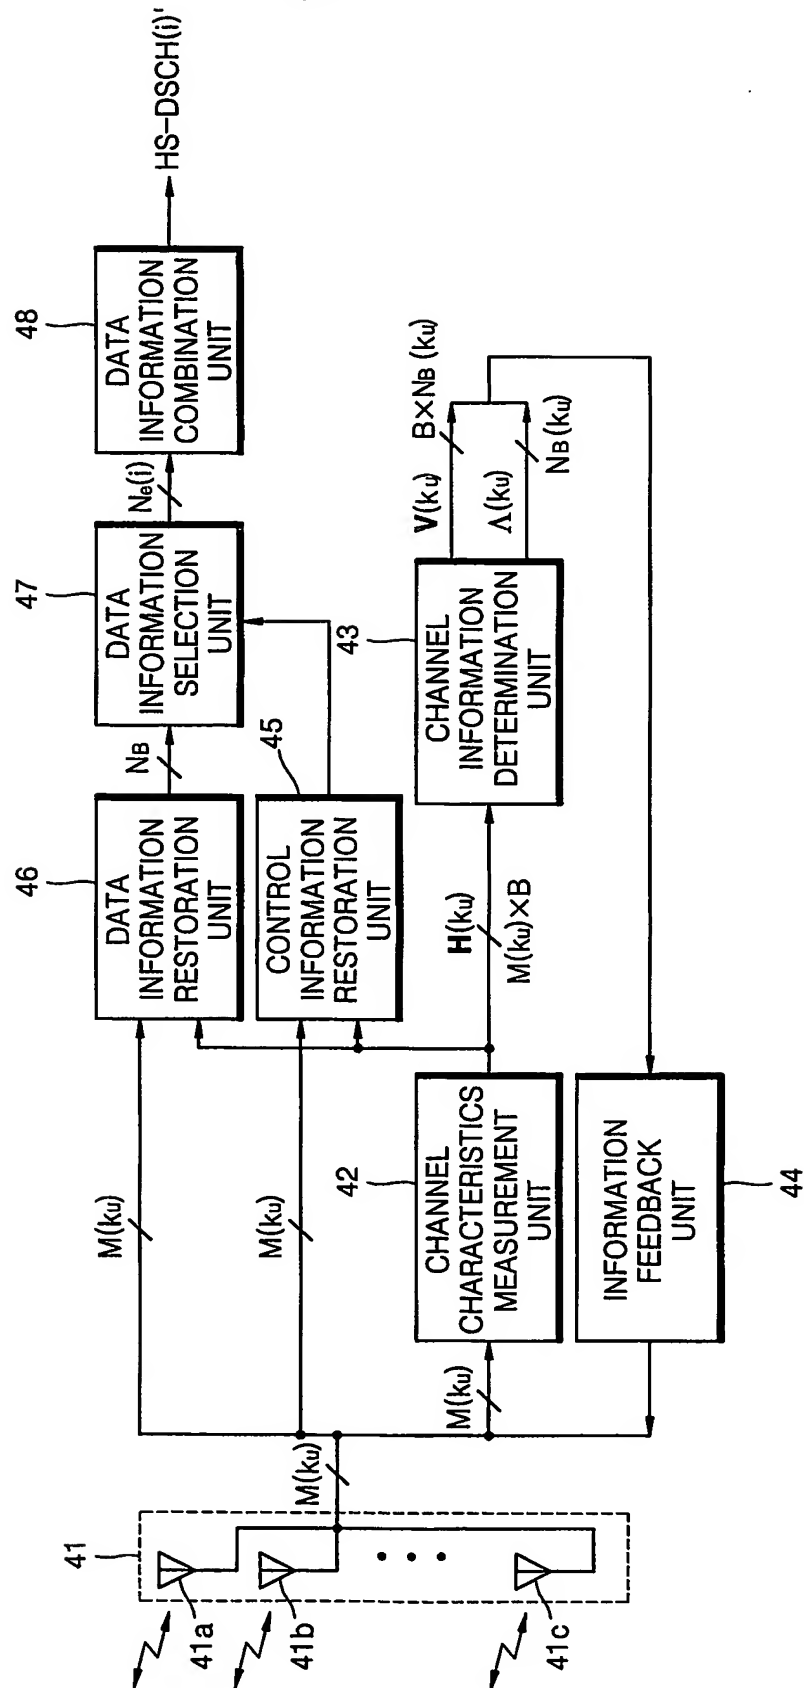

5/10

FIG. 5


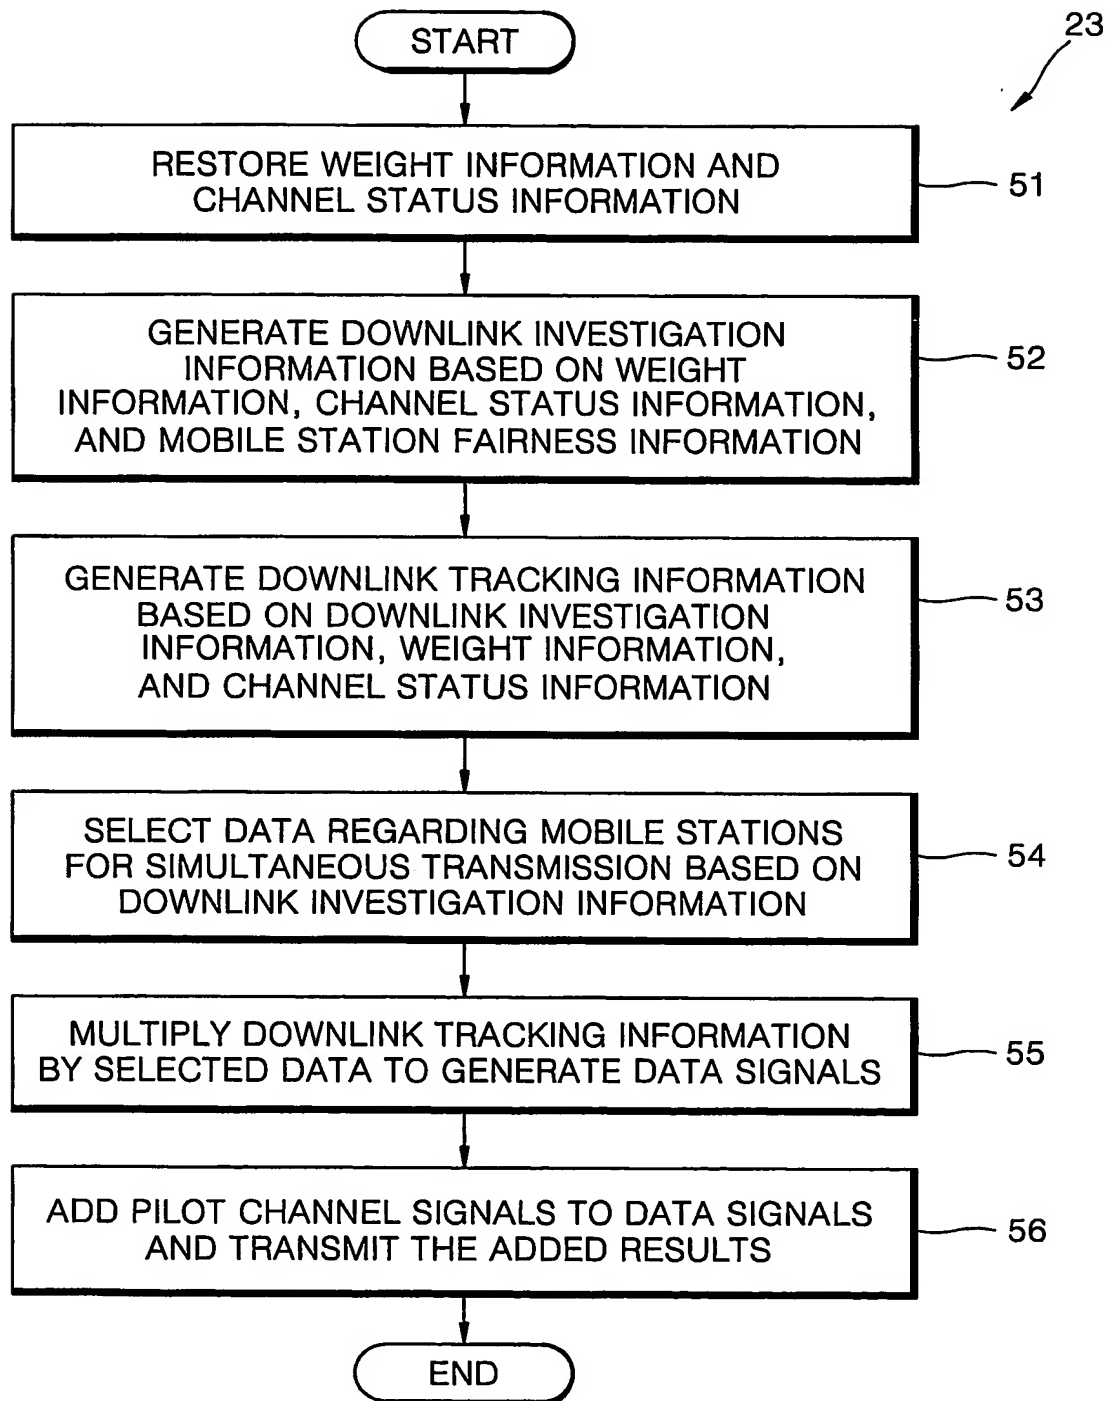



FIG. 6



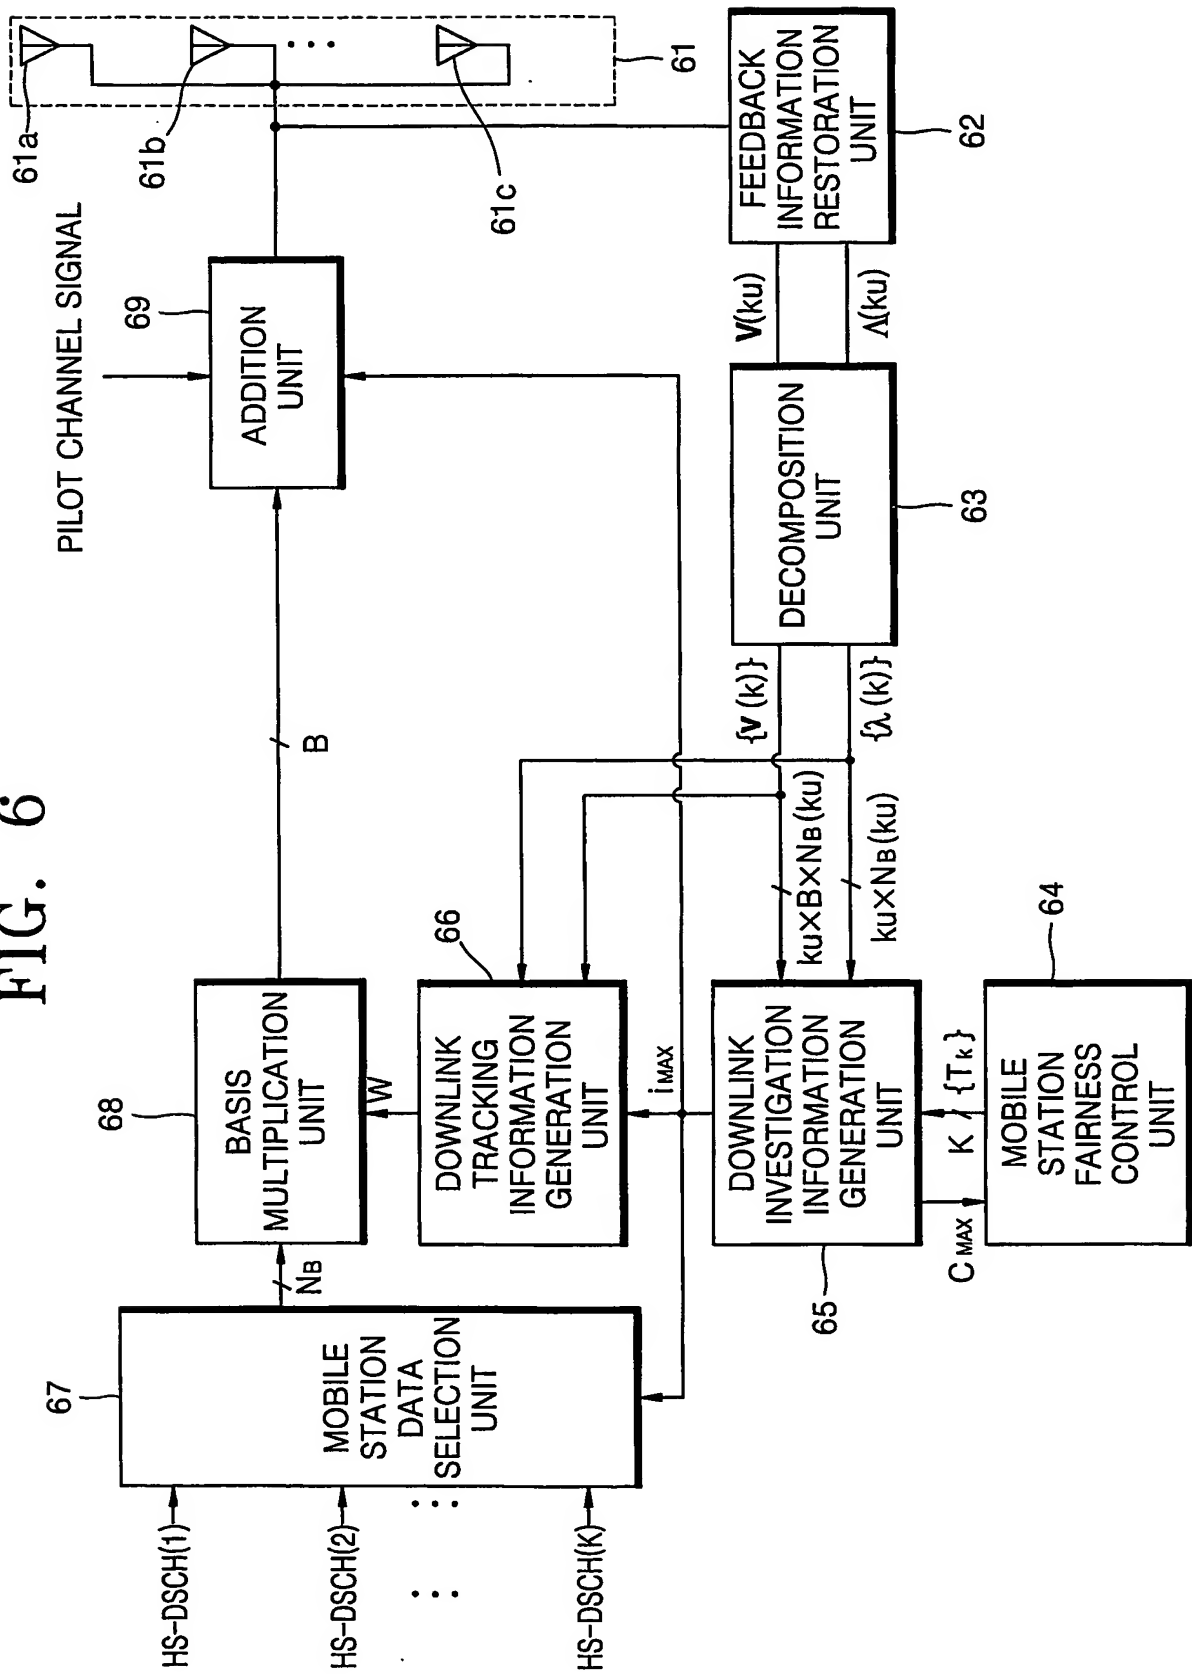

7/10

FIG. 7

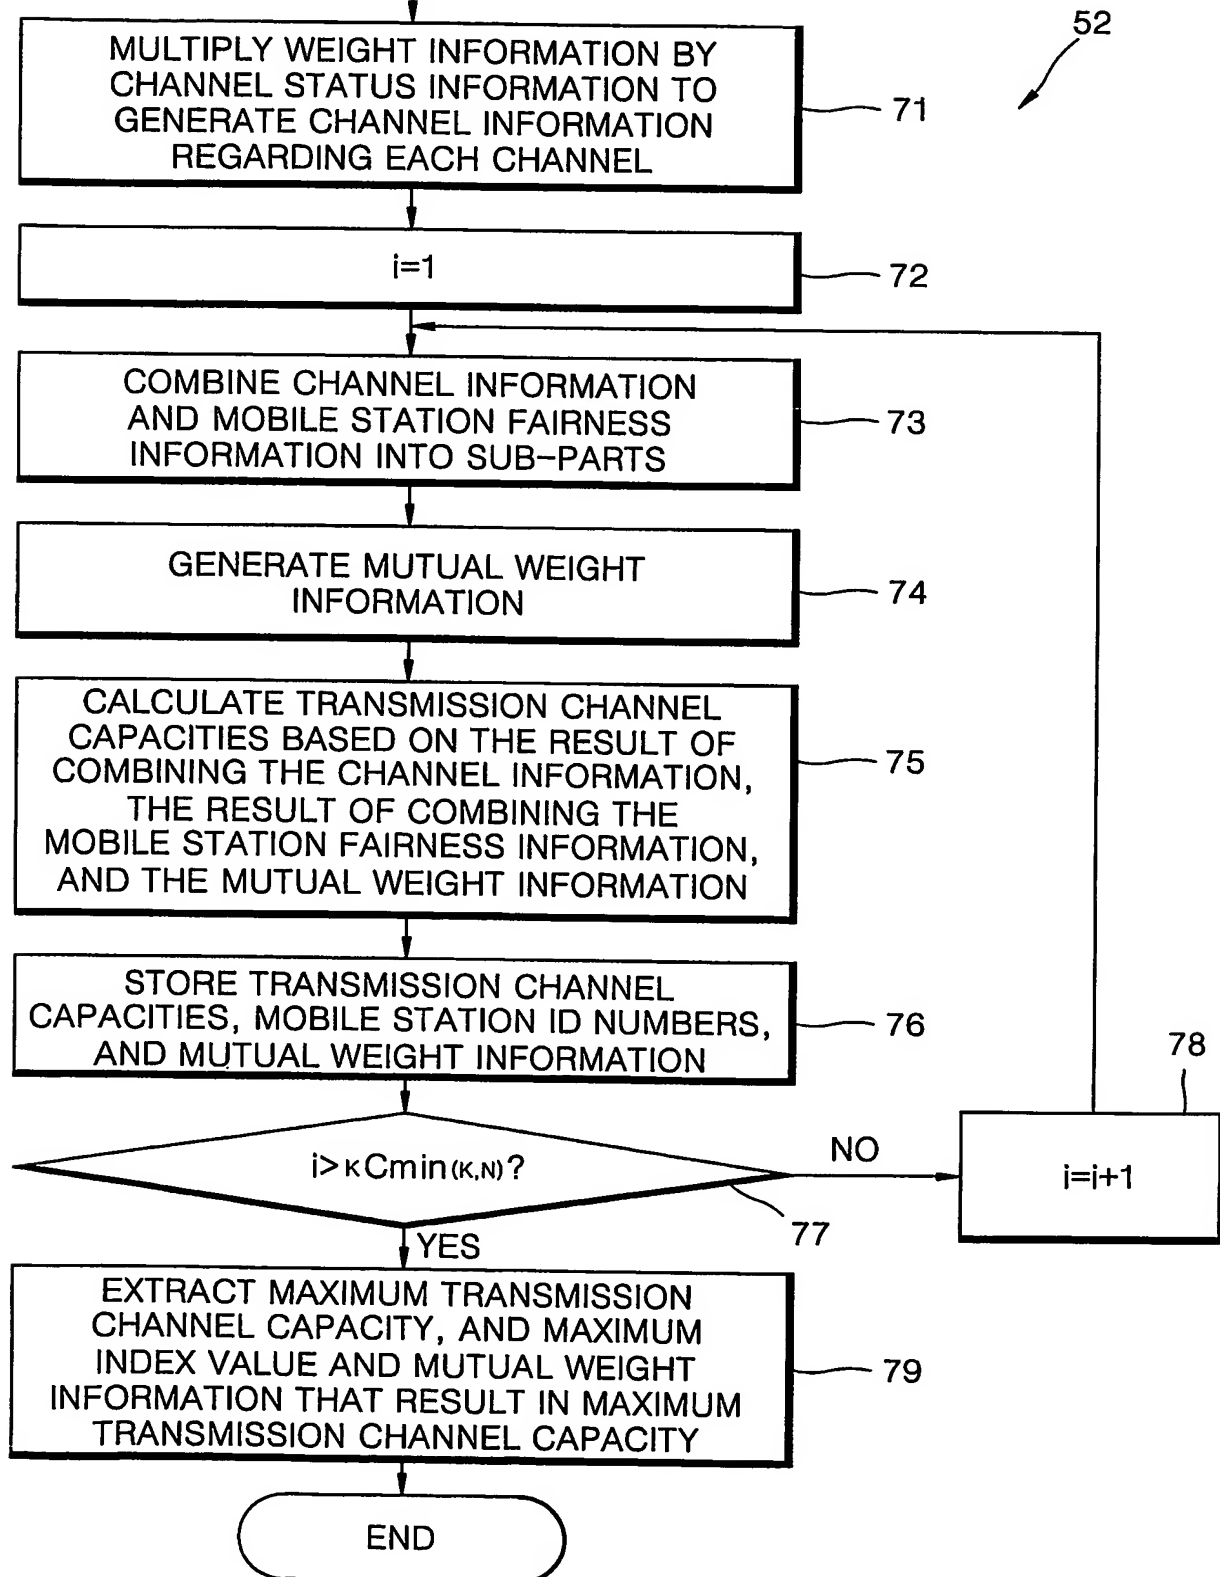

8/10

FIG. 8

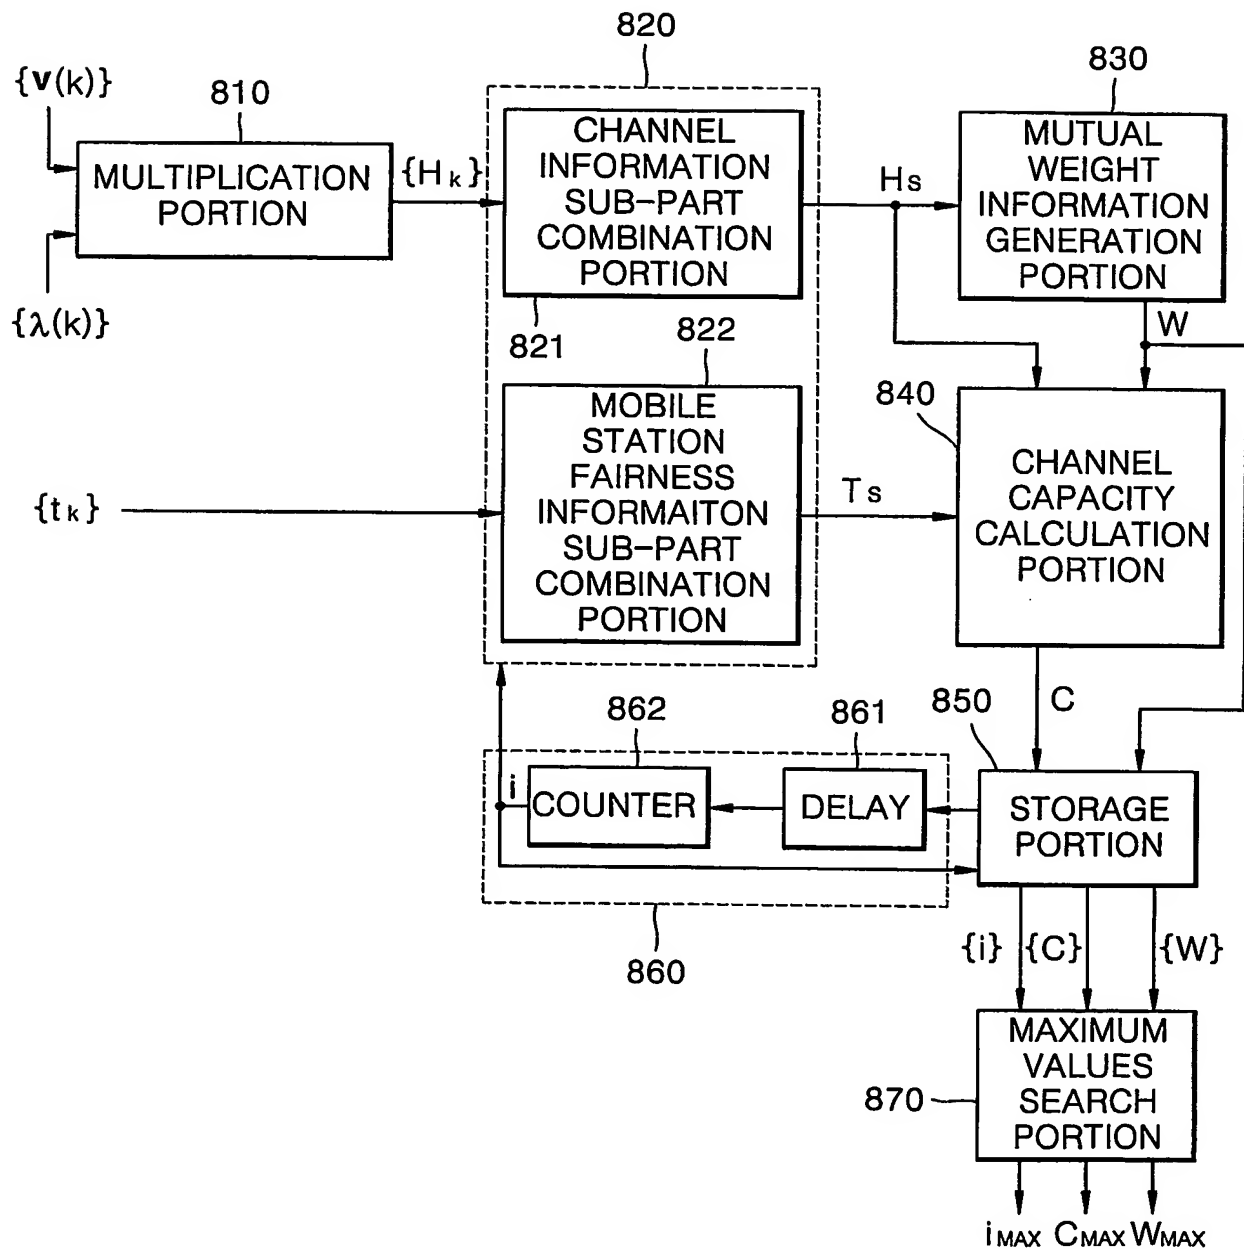


FIG. 9


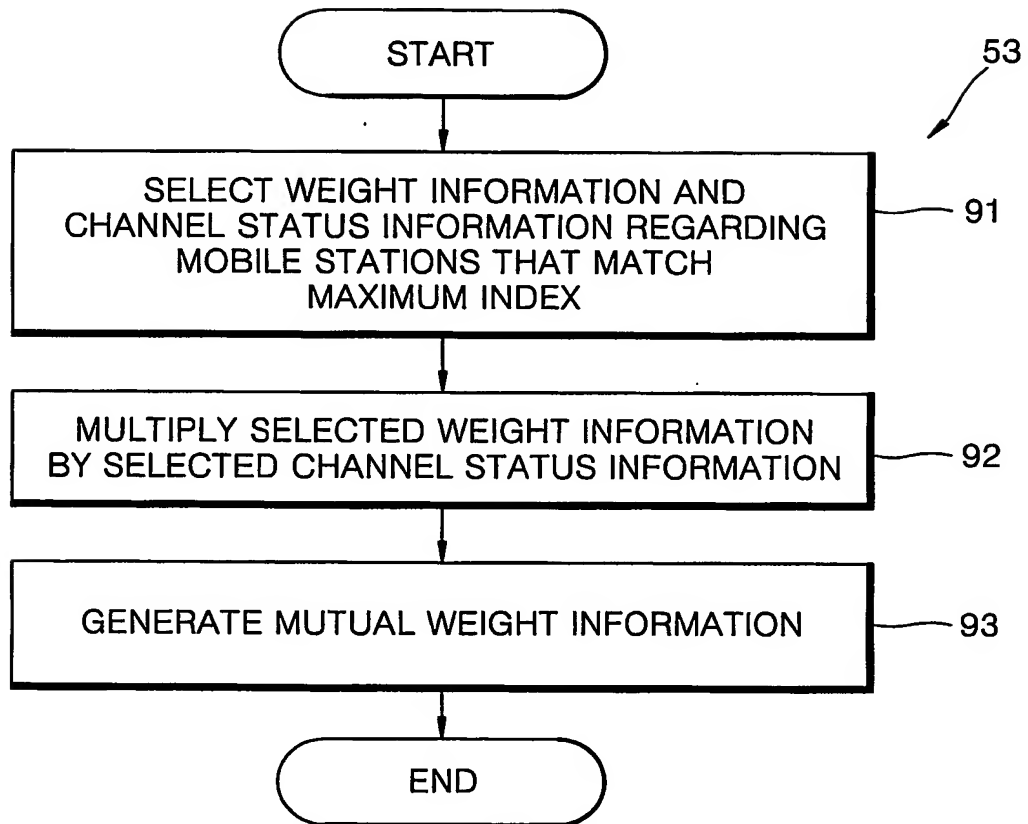


FIG. 10

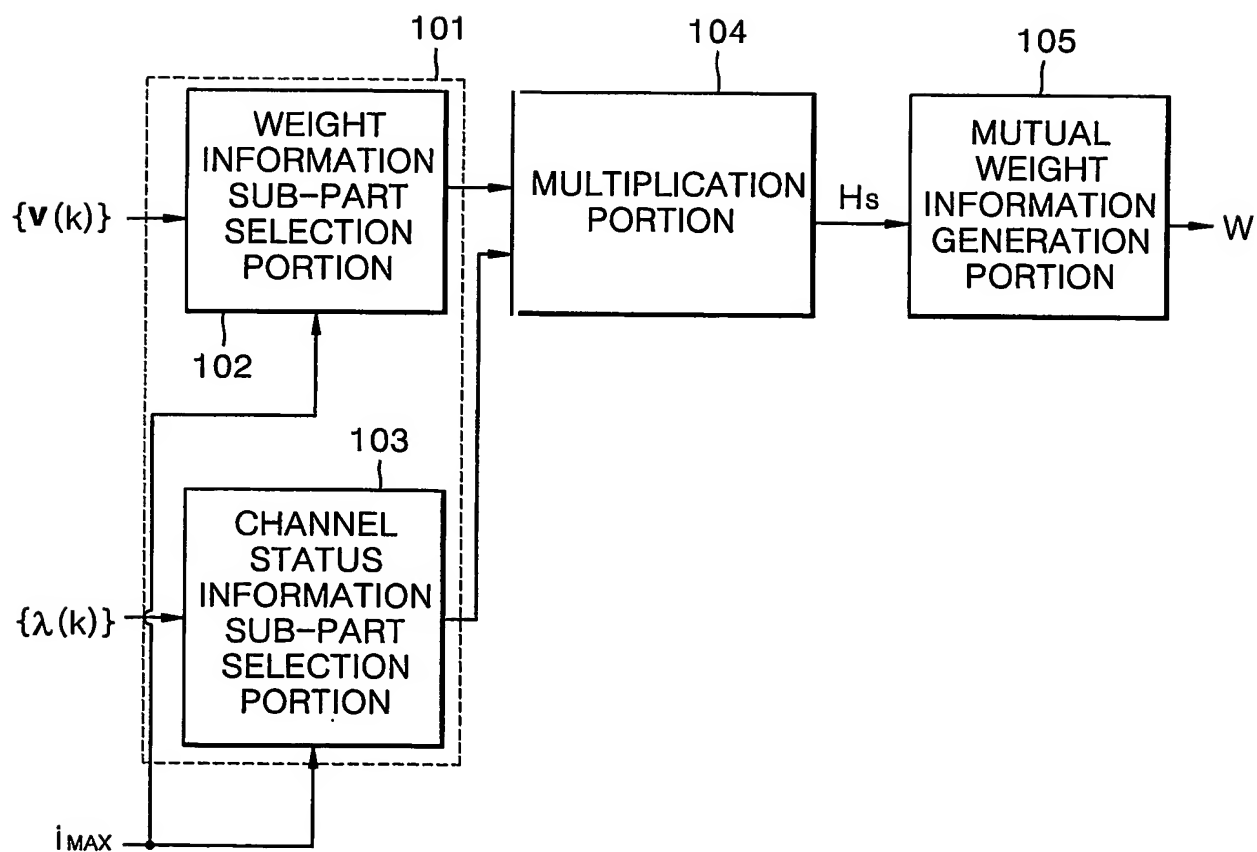

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/KR2003/002188**A. CLASSIFICATION OF SUBJECT MATTER****IPC7 H04B 7/26**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC7 H04B 7/02, H04B 7/08

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
KR, JP as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PY	KR 2003-17946 A ( SAMSUNG ELECTRONICS CO. LTD. ) 04 MARCH 2003 (04.03.2003) see the whole documents	1 - 27
PY	KR 2003-33601 A ( SAMSUNG ELECTRONICS CO. LTD. ) 01 MAY 2003 (01.05.2003) see the whole documents	1, 20
A	KR 2001-95535 A ( SAMSUNG ELECTRONICS CO. LTD. ) 07 NOVEMBER 2001 (07.11.2001) see the detailed description	1, 20
A	US 5,548,834 A ( BRUNO PL SUARD ) 20 AUGUST 1996 (20.09.1996) see the claims and fig. 3	1, 20

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 JANUARY 2004 (20.01.2004)

Date of mailing of the international search report

20 JANUARY 2004 (20.01.2004)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office  
920 Dunsan-dong, Seo-gu, Daejeon 302-701,  
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

NAM, Ki Young

Telephone No. 82-42-481-5710



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR2003/002188

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
KR 2003-17946 A	04.03.2003	NONE	
KR 2003-33601 A	01.05.2003	NONE	
KR 2001-95535 A	07.11.2001	NONE	
US 5,548,834 A	20.09.1996	EP0639897A1 CN1117677A DE69331140D1 DE69331140T2 EP0639897A1 ES2164062T3 JP7154864A US5548834A	22.02.1995 28.02.1996 20.12.2001 04.07.2002 22.02.1995 16.02.2002 16.06.1995 20.08.1996